


## CWSMS-Series Single Station Surface Mounted Wall Shower

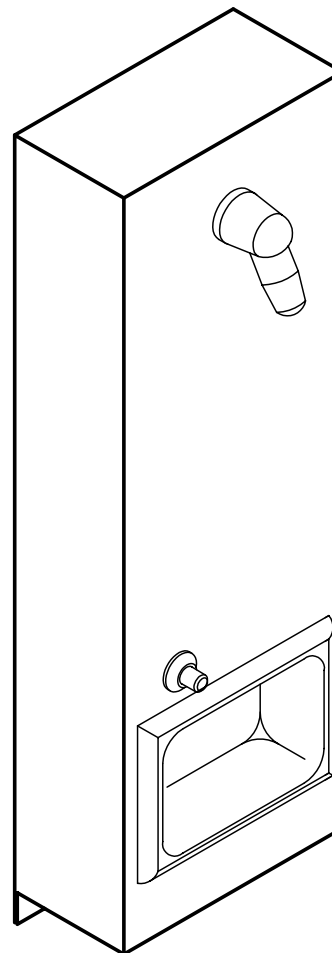

(Some options may be shown)

| ✓ | MODEL NUMBER | VALVE TYPE                 |
|---|--------------|----------------------------|
|   | CWSMS-PM1    | SINGLE TEMP PNEU. METERING |
|   | CWSMS-PM2    | DUAL TEMP PNEU. METERING   |
|   | CWSMS-EL1    | SINGLE TEMP ELECTRONIC     |
|   | CWSMS-EL2    | DUAL TEMP ELECTRONIC       |
|   | CWSMS-PB     | PRESSURE BALANCING         |
|   | CWSMS-TSV    | THERMOSTATIC               |
|   | CWSMS-H      | SINGLE TEMP COMPRESSION    |
|   | CWSMS-HC     | DUAL TEMP COMPRESSION      |
|   | CWSMS-NV     | NO VALVE                   |

### Recommended Specifications \_\_\_\_\_

Surface mounted single station shower shall be Willoughby Model No. **CWSMS-\_\_\_** (select valve from table above).

Shower panel shall be fabricated from 16 gauge, type 304 stainless steel with exposed stainless surfaces polished to a #4 satin finish.

Standard equipment shall include: shower valve \_\_\_\_\_ (as selected from table above), APS adjustable spray vandal resistant showerhead, and "Z" clip mounting bracket.

Anchoring shall be by "Z" clip and bottom flange, with anchoring hardware by others. Unit requires no chase area for installation and maintenance.

Visit our website at <http://www.willoughby-ind.com>

2210 West Morris Street • P.O. Box 21217 • Indianapolis, IN 46221

(317) 638-2381 • Fax: (317) 638-6110 • (800) 428-4065

## MODEL NUMBER AND OPTIONS:

**1.) Shower Head Height  
(Not Part of Model Number):**

- 6'-0"
- 5'-6"
- 5'-0"
- 4'-0"
- Other \_\_\_\_\_"

**4.) Shower Head Options:**

- APS Adjustable Penal Showerhead (Standard)
- NPS Non-Adjustable Penal Showerhead
- UBJ Universal Ball Joint Shower Head
- UDBJ Up Down Ball Joint Shower Head
- LBJ Lockable Ball Joint Shower Head
- FX Flexshower

**2.) Base Model Number:**

- CWSMS Single Station Surface Mounted Shower


**5.) Options:**

- BF Barrier Free Station
- GB Grab Bar (Specify Dimensions)
- GX Individual Checkstops
- HL Hi-Lo (2 Mounting Brackets for Flexshower)
- RD Recessed Soap Dish
- SD Surface Mounted Soap Dish
- PS Pipe Shroud (Specify Length)
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

**3.) Valve Selection:**

- PM1 Single Temp. Pneu. Metering
- PM2 Dual Temp. Pneu. Metering
- EL1 Single Temp. Electronic
- EL2 Dual Temp. Electronic
- PB Pressure Balancing
- TSV Thermostatic Mixing Valve
- H Single Temp. Compression
- HC Dual Temp. Compression
- NV No Valve

Drawing Approved For Manufacturing By: \_\_\_\_\_ Date: \_\_\_\_\_ Company: \_\_\_\_\_  
 Wall Thickness: \_\_\_\_\_ Wall Type: \_\_\_\_\_

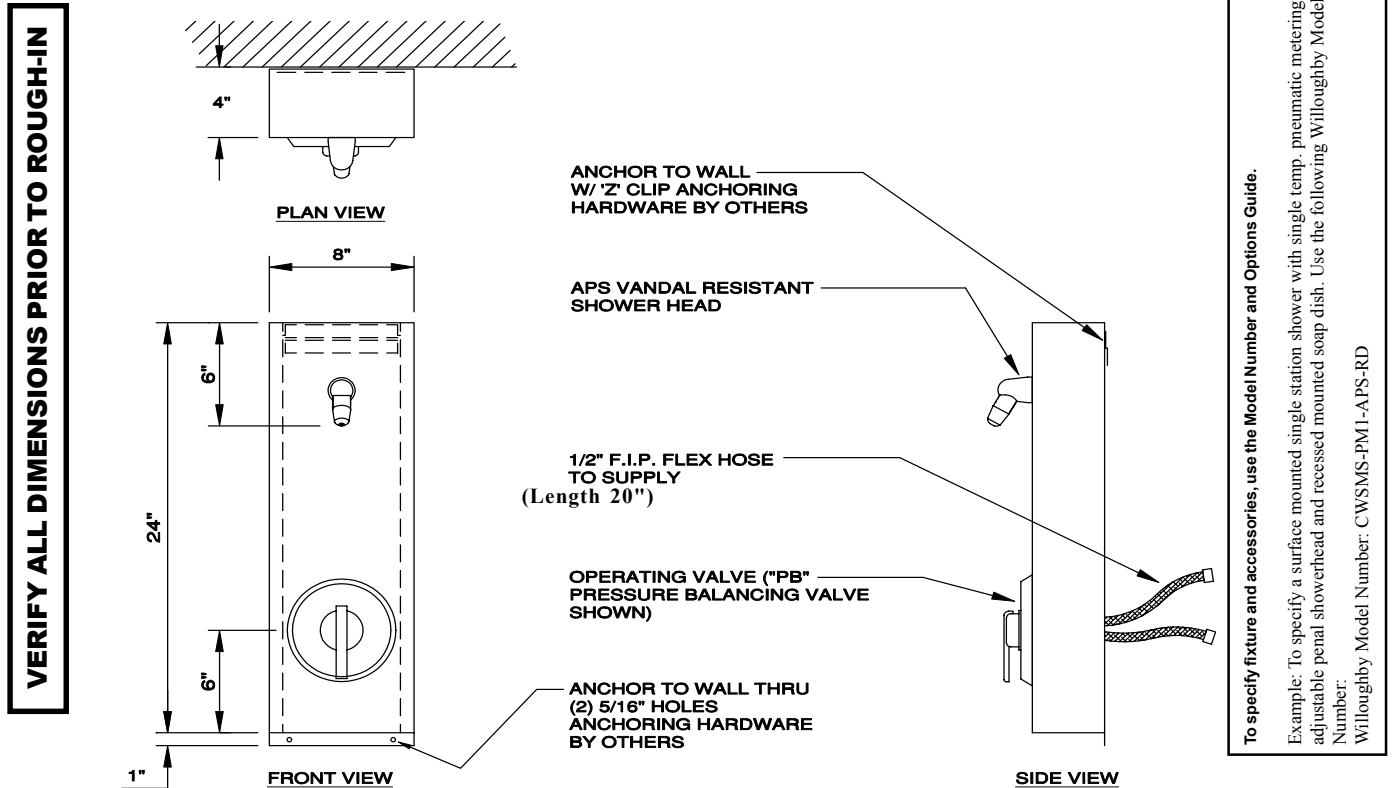

## Willoughby Industries, Inc.